

Roller Blinds - Child Safety

Cord Tidy

For the installer

Split cord tidy, put chain into the male section, insert female section into this. Keep cords and chain taught, fix to wall or window frame at side of the blind.

Always attach a Safety Warning Tag

For the consumer

Always ensure that the chain remains housed within the cord tidy.



Bell Toggle

The chain loop can be split and the bell toggles attached to each end of the chain.



Easybreak® Connector

For the installer


Join operating chain by last ball of each end into the larger holes on each side of the 2 connectors.

Two Easybreak® connectors should be fitted within the chain loop 200mm apart. This way one Easybreak® connector is always in the vertical position to perform as required. When blind is raised a connector should be at top of the blind on the chain length nearest the window.

Always attach a Safety Warning Tag

For the consumer


If any reasonable weight is placed within the loop, at least one of the Easybreak® connectors will break apart*. To re-connect, check connectors are not damaged, then insert the end of the ball chain into larger hole in each connector. Push home leaving the chain in the same position as before. A connector should be at the top of the blind, on the side of the chain nearest to the window when blind is raised.

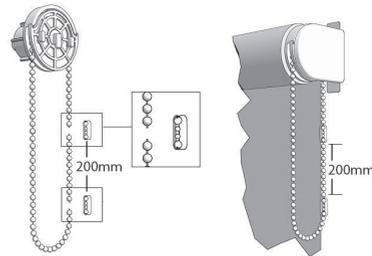

*Genuine Louvolite No.10 Chain and Easybreak® connector must be used.



Easi Lift™ Assembly & Fitting Instructions

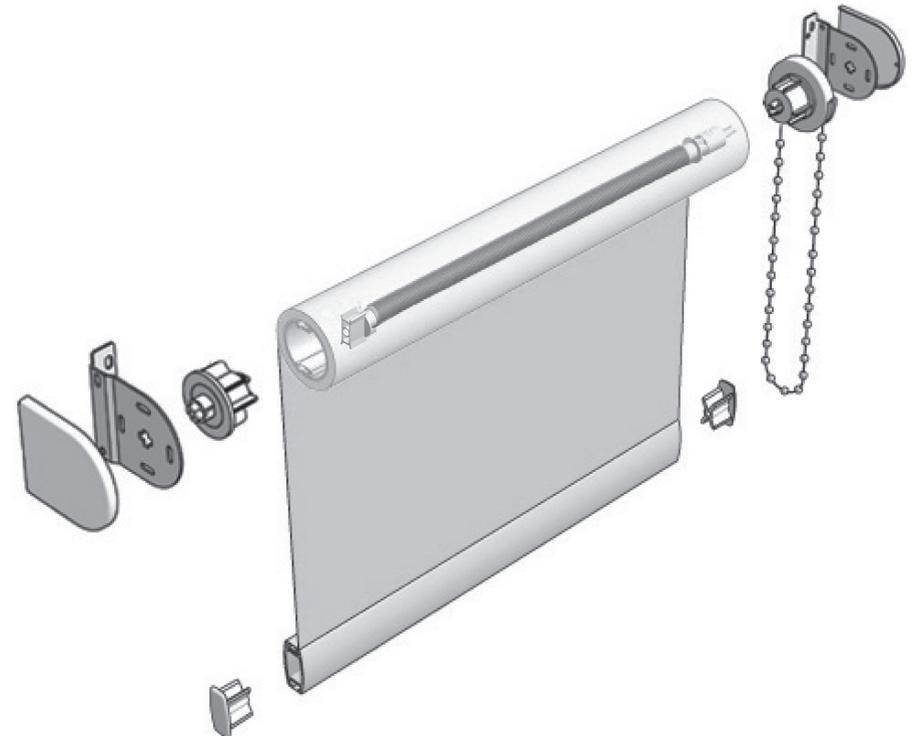

WARNING

Young children can strangle in the loop of pull cords, chains and tapes, and cords that operate window coverings. They can also wrap cords around their necks. To avoid strangulation and entanglement, keep cords out of the reach of young children. Move beds, cots and furniture away from window covering cords.

"Complete elimination of the strangulation risk can only be achieved by keeping cords, chains, and tapes and similar out of the reach of children. Use of additional safety devices may reduce the risk of strangulation but cannot be considered foolproof.. Persons in charge of children are ultimately responsible for following the safety instructions provided by the manufacturer." EN 13120



Scan this with your smartphone to view Louvolite training videos

Louvolite Customer Services

Tel: 0161 882 5050 Fax: 0161 882 5059 Email: sales@louvolite.com

Easi Lift™ Fitting Instructions


Please note that the minimum width blind that can be made is 860mm

Assembling System 40®

Attach the System 40 control end to either the left hand (R3726 blue) or right hand (R3725 black) spring by snap fixing together.

Insert the right hand spring into the right hand side of the roller tube (or LHS into the left side of the tube) by locating the end section into the two grooves of the tube

Before fitting the side control end into the tube, check the tension chart for the pre-tension turns required to charge the spring - turns to be made towards the operator. Make the recommended number of turns and fit the control end into the tube.

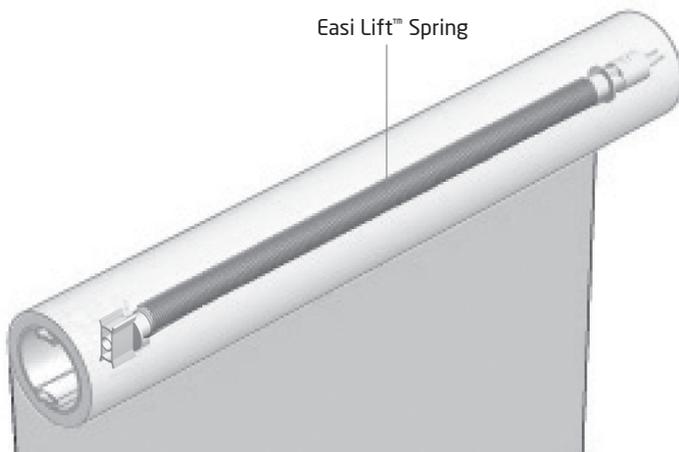

Easi Lift™ Fitting Instructions

Assembling System 45®

Attach the System 45 control end to either the left hand (R3726 blue) or right hand (R3725 black) spring by snap fixing together.

Snap fit a System 45 spring adaptor (R3735) to the opposite end.

Insert the right hand spring into the right hand side of the roller tube (or LHS into the left side of the tube) by locating the end section into the three grooves of the tube

Before fitting the side control end into the tube, check the tension chart for the pre-tension turns required to charge the spring - turns to be made towards the operator. Make the recommended number of turns and fit the control end into the tube.

